



| | |
|-------------------------|--|
| REFERENCE: | EMS Tretford Design Range |
| MANUFACTURER: | Entrance Matting Systems Limited. Freiston Business Park, Priory Road, Freiston, Boston, Lincolnshire PE22 0JZ. Tel: 01205 761757 www.entrance-matting.com |
| THICKNESS: | Low 11mm Standard 17mm |
| GRADE: | Extra heavy contract |
| SIZE: | Panels are manufactured specifically to customer's required sizes, however EMS are able to manufacture up to 4000mm left to right without join. |
| COLOURS: | See product information. There are 48 colours, including 3 undyed colours. |
| INFILL MATERIAL: | See technical data sheet. |
| INSTALLATION: | It is recommended that all fitting is carried out by CSCS registered Engineers. |
| MATWELL FRAMES: | 20 x 20 x 3mm, 16 x 16 x 3mm, 13 x 13 x 13 x 2mm aluminium mill finish angle frames. Ramp profile 11mm and 17mm. |

Low Profile

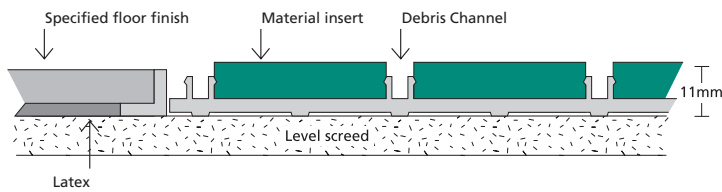

Standard Profile

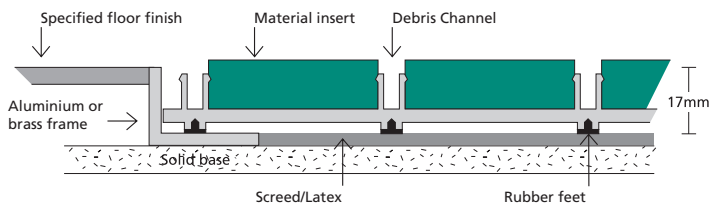

TECHNICAL DATA INFILL MATERIAL

All aluminium used in the Tretford range is over 90% recycled.

PILE COMPOSITION: 70% Goat hair and 30% nylon

BACKING COMPOSITION: Bonded with 100% natural latex to a natural hessian/jute backing.

TOTAL THICKNESS: 8-9mm

TOTAL WEIGHT: ca. 3.8kg/sqm

WEAR CLASSIFICATION: BS EN1307:2005 class 33 LC2 Heavy Commercial Use

COLOUR FASTNESS: BS 1006:1990 to light - colour change: 5-6, very slight to none. To rubbing - colour change: 4, very slight

APPLICATION: Entrance systems, Heavy Contract wheeled traffic

FLAMMABILITY: Class: Low BS 4790:1987 mean radius of burning :
BS EN150 11925:2002, BS EN 9239-1: Crucial radiant flux test

