



REFERENCE:	EMS Tretford Design Range
MANUFACTURER:	Entrance Matting Systems Limited. Freiston Business Park, Priory Road, Freiston, Boston, Lincolnshire PE22 0JZ. Tel: 01205 761757 www.entrance-matting.com
THICKNESS:	Low 11mm Standard 17mm
GRADE:	Extra heavy contract
SIZE:	Panels are manufactured specifically to customer's required sizes, however EMS are able to manufacture up to 4000mm left to right without join.
COLOURS:	See product information. There are 48 colours, including 3 undyed colours.
INFILL MATERIAL:	See technical data sheet.
INSTALLATION:	It is recommended that all fitting is carried out by CSCS registered Engineers.
MATWELL FRAMES:	20 x 20 x 3mm, 16 x 16 x 3mm, 13 x 13 x 13 x 2mm aluminium mill finish angle frames. Ramp profile 11mm and 17mm.

Low Profile

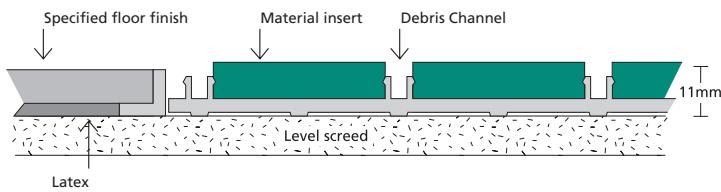

Standard Profile

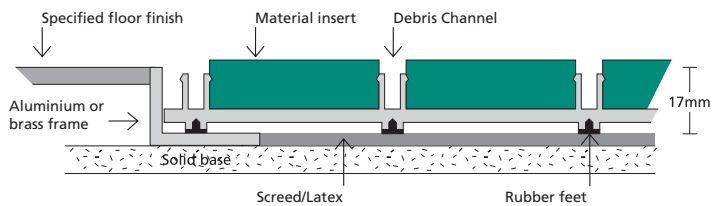

TECHNICAL DATA INFILL MATERIAL

All aluminium used in the Tretford range is over 90% recycled.

PILE COMPOSITION:	70% Goat hair and 30% nylon
BACKING COMPOSITION:	Bonded with 100% natural latex to a natural hessian/jute backing.
TOTAL THICKNESS:	8-9mm
TOTAL WEIGHT:	ca. 3.8kg/sqm
WEAR CLASSIFICATION:	BS EN1307:2005 class 33 LC2 Heavy Commercial Use
COLOUR FASTNESS:	BS 1006:1990 to light - colour change: 5-6, very slight to none. To rubbing - colour change: 4, very slight
APPLICATION:	Entrance systems, Heavy Contract wheeled traffic
FLAMMABILITY:	Class: Low BS 4790:1987 mean radius of burning : BS EN150 11925:2002, BS EN 9239-1: Crucial radiant flux test

